


Zwischenflanschrückschlagklappe Baureihe ARTRKSE

Size : DN40 to DN600
Connection : Between flanges PN10/16 up to DN150, PN16 over Class 150 (PN20) from DN100 to 400
Min Temperature : -10°C
Max Temperature : +110°C
Max Pressure : 16 Bars up to DN200, 10 bars over
Specifications : EPDM seat
 Horizontal or vertical position with ascendant fluid
 Wafer type
 Removable hoisting eye
 Weak headloss




Materials : Chromed Carbon Steel ASTM A216 WCB

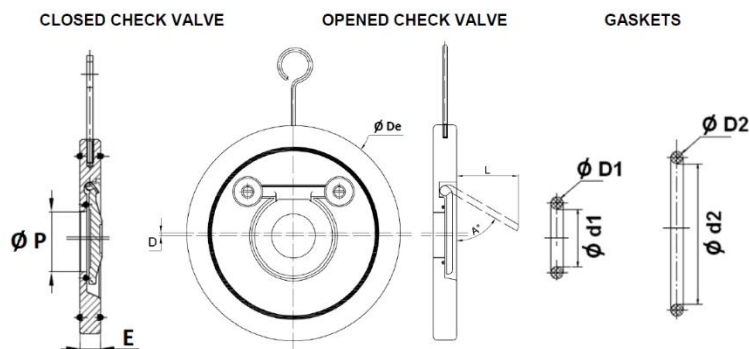

DN	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600	
E	14	14	14	14	18	18	20	22	26	32	38	44	50	56	62	
Ø De	94	109	129	144	164	194	220	275	331	386	446	497	557	619	736	
Ø P	22	32	40	54	70	92	112	154	192	227	270	315	358	410	490	
L	24.5	33	32	47.7	70.4	93	112	149.3	171.9	225.7	229.6	268.2	296.7	329.5	434.8	
A (°)	54	54	34	43	55	60	59	58	53	61	48	48	46	46	54	
D	1	1	2	3	3	5	5	5	6	10	12	12	12	12	14	
Ø d2	70	80.5	100	107.5	134.5	158	186	240	284	328	385	435	486	534	630	
Ø D2	3.8									6	8					
Ø d1	24	34	46.5	59	72.5	93	113.5	156.5	194.5	231	283	328	375	426	510	
Ø D1	3				3.8					6	8					
Weight (Kg)	0.69	0.86	1.2	1.49	2.42	3.29	4.72	7.92	13.73	21.04	31.5	47	70	96	135	


Zwischenflanschrückschlagklappe Baureihe ARTRKSE

Item	Designation	Materials
1	Body	Chromed ASTM A216 WCB
2	Disc	
3	Seat	EPDM
4	Gasket	EPDM

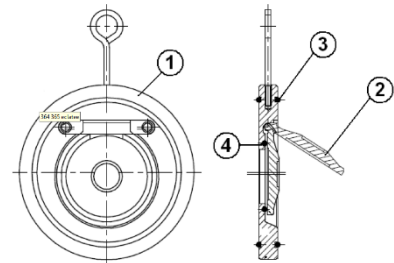

INSTALLATION POSITIONS :

Vertical position (ascendant fluid)

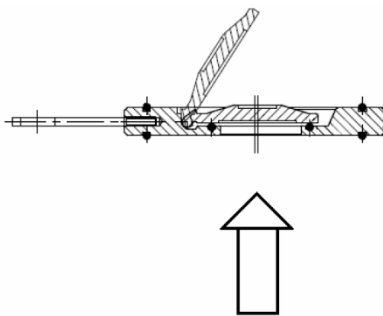

Horizontal position

